H.264 Network DVR User Manual

Please read instructions thoroughly before operation and retain it for future reference.

IMPORTANT SAFEGUARD



CAUTION



RISK OF ELECTRIC SHOCK

CAUTION:

To reduce the risk of electric shock, do not expose this apparatus to rain or moisture. Only operate this apparatus from the type of power source indicated on the label. The company shall not be liable for any damages arising out of any improper use, even if we have been advised of the possibility of such damages.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



All lead-free products offered by the company comply with the requirements of the European law on the Restriction of Hazardous Substances (RoHS) directive, which means our manufacture processes and products are strictly "lead-free" and without the hazardous substances cited in the directive.



The crossed-out wheeled bin mark symbolizes that within the European Union the product must be collected separately at the product end-of-life. This applies to your product and any peripherals marked with this symbol. Do not dispose of these products as unsorted municipal waste. Contact your local dealer for procedures for recycling this equipment.



This apparatus is manufactured to comply with the radio interference requirements.

Disclaimer

The information in this manual was current when released. We reserve the right to revise or remove any content in this manual at any time. We do not warrant or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of this manual. For the actual display & operation, please refer to your DVR in hand. The content of this manual is subject to change without notice.

The product & company names mentioned herein may be the registered trademarks or tradenames of their respective owners.

Grounding

This is a Safety Class 1 Product (provided with a protective earthing ground incorporated in the power cord). The mains plug shall only be inserted in a socket outlet provided with a protective earth contact. Any interruption of the protective conductor inside or outside of the instrument is likely to make the instrument dangerous. Intentional interruption is prohibited.

Water & Moisture

Do not expose this product to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the product.

MPEG4 Licensing

THIS PRODUCT IS LICENSED UNDER THE MPEG-4 VISUAL PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER FOR (i) ENCODING VIDEO IN COMPLIANCE WITH THE MPEG-4 VISUAL STANDARD ("MPEG-4 VIDEO") AND/OR (ii) DECODING MPEG-4 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED BY MPEG LA TO PROVIDE MPEG-4 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION INCLUDING THAT RELATING TO PROMOTIONAL INTERNAL AND COMMERCIAL USES AND LICENSING MAY BE OBTAINED FROM MPEG LA, LLC. SEE HTTP://WWW.MPEGLA.COM.

GPL Licensing



This product contains codes which are developed by Third-Party-Companies and which are subject to the GNU General Public License ("GPL") or the GNU Lesser Public License ("LGPL").

The GPL Code used in this product is released without warranty and is subject to the copyright of the corresponding author.

Further source codes which are subject to the GPL-licenses are available upon request.

We are pleased to provide our modifications to the Linux Kernel, as well as a few new commands, and some tools to get you into the code. The codes are provided on the FTP site, and please download them from the following site or you can refer to your distributor:

ftp://ftp.dvrtw.com.tw/GPL/AV074/

Version

Firmware: 1133-1039-1013-1025-0a-0000;

Video Viewer: 0119

TABLE OF CONTENTS

1. OVERVIEW	
1.1 Features	1
1.2 Specifications	
1.3 Package Contents	3
2. FRONT AND REAR PANELS	4
2.1 Front Panel	
2.2 Rear Panel	6
3. CONNECTIONS AND SETUP	7
3.1 SATA HDD Installation	7
3.2 Camera Connection	g
3.2.1 Normal Camera Connection	
3.2.2 PTZ Camera Connection	9
3.2.3 DCCS Camera Connection	10
3.3 Power Setup	10
3.4 Date and Time Setting	
3.5 Password Setting	
4. BASIC OPERATION	12
4.1 Live Page	10
4.2 Recording	
4.3 Playback	
4.4 Key Lock and Unlock	
4.5 Upgrade	14
4.6 Search	
5. MAIN MENU	
5.1 Menu Configuration	
5.2 Menu Operation instruction	IX
6. QUICK START MENU	
6.1 Status	16
6.2 Manual Record	17
6.3 Timer	18
6.4 Date	19
7. ADVANCED MENU	21
7.1 Advanced Configuration	21
7.1.1 Camera	21
7.1.2 Detection	22
7.1.3 Alert	
7.1.4 Network	
7.1.5 SNTP	
7.1.6 Display	
7.1.7 Record	
7.1.8 Remote	
7.2 System Info	
7.3 Event Info	31

7.3.1 Quick Search	31
7.3.2 Event Search	32
7.3.3 HDD Info	32
7.3.4 Event Log	33
7.4 Backup	33
7.4.1 USB BACKUP	34
7.4.2 DISK BACKUP (Selected Model Only)	35
8. REMOTE OPERATION	36
8.1 Supplied Licensed Software	36
8.1.1 Installation & Network Connection	36
8.1.2 Control Panel Overview	37
Simplified Version (Default)	37
Full Function Version	38
Main Button Overview	38
8.1.3. General Operation	39
Record	
Playback	
Network Backup	
8.1.4. E-Map	
How to Add an E-Map Group	
How to Edit / Remove an Existing E-Map Group	
8.2 IE Web Browser	
8.3 Quick Timer Player	48
APPENDIX 1 PIN CONFIGURATION	49
APPENDIX 2 COMPATIBLE USB FLASH DRIVE BRAND	50
APPENDIX 3 COMPATIBLE HDD BRAND	51
APPENDIX 4 TROUBLESHOOTING	52
APPENDIX 5 RS485 PROTOCOL	53

1. OVERVIEW

Note: To know details about 16CH & 8CH models, please download from the following website: http://www.surveillance-download.com/user/DCC manual.pdf

1.1 Features

Easy & Complete CCTV Solution

· Controls your speed dome cameras and auto zoom cameras by DVR with a video cable connected only

H.264 Video Compression Technology

- · At the local site, the file size is minimized and the record time is lengthened
- At the remote site, with the features of small file size and low bit rate, it will be more adaptive to different kinds of network environment compared with conventional codec designs

DCC (DVR Camera Communication) Technology

- · Allows easy installation without having to connect the RS-485 cable and to change the current decoration.
- · Supports excellent functions of adjusting for zoom-in and zoom-out via DVR directly.

Graphical & Multi-language OSD

Remote Independent Operation

Allows single-channel viewing of live displays without changing display settings on the licensed software AP provided

Free Upgrade to Advanced Functions

· Allows you to upgrade DVR functions without any charges

Multiplex Operation

· Allows live display, record, playback, backup, and network operations at the same time

Excellent Image Quality and Performance

· The CIF image quality is excellent for clear and detailed image

Intelligent Motion Trigger Recording

- R.E.T.R. (Remote Event Trigger Recording)
- Activates event recording automatically when alarm is triggered, and sends alerts with images to the designated e-mails / FTP address
- Customizable security settings are achieved with the advanced motion detection, the scheduled motion detection recording (with 4 individually adjustable parameters), and the quick search function
- Supports pre-alarm recording (8MB)

Backup Devices

· Supports USB 2.0 flash drive, DVD writer (optional), and network

Remote Surveillance

• Supports remote surveillance up to 20 users simultaneously with the licensed software "Video Viewer", Internet Explorer / Mozilla Firefox web browser, and QuickTime player.

Covert Recording

· Blank screen replaces live displays to achieve covert recording

A/V Support

- Supports 4 audio-in, 1 audio-out to record sounds
- Supports VGA output to monitor (VGA interface built-in / output resolution up to 1600 x 1200)

General

- Supports SATA HDDs
- Supports IR remote controller and keyboard controller
- · System auto recovery after power failure
- Supports PTZ camera operations through RS-485, and PTZ Hot Point function
- Supports daylight saving function
- Supports manual / timer / motion / alarm / network recording
- · Supports TCP/IP, PPPoE, DHCP and DDNS network connection.

1.2 Specifications

MODEL	Mode 1	Mode 2		
Video System	NTSC / PAL (auto detection)			
Video Compression Format	H.264			
Video Input (Composite video signal 1 Vp-p 75Ω BNC)	4 Channels			
Video Loop Output (Composite video signal 1 Vp-p 75Ω BNC)	4 Cha	nnels		
	Main Monitor Outpu	t: for stable display		
Video Output (BNC)	Call Monitor Output: for sequence display			
Video Output (VGA)	Built-in VGA outpu	t for LCD monitor		
Audio Input	4 Channel	s (Mono)		
Audio Output	1 Channe	el (Mono)		
Multiplex Operating	Supports live display, record, playback	, backup, and network simultaneously		
Mayimum Departing Data (Frame)	30 IPS @ 72	0×480 <ntsc></ntsc>		
Maximum Recording Rate (Frame)	25 IPS @ 72	20×576 <pal></pal>		
Maximum Recording Rate (Field)	60 IPS @ 72	0×240 <ntsc></ntsc>		
iviaximum Recording Rate (Fleid)	50 IPS @ 7	20×288 <pal></pal>		
Maximum Recording Rate (CIF)	120 IPS @ 3	52×240 <ntsc></ntsc>		
iviaximum Recording Rate (OIF)	100 IPS @ 352×288 <pal></pal>			
Recording Mode	Manual / Timer / Motion / Alarm / Remote			
Recording Quality Options	Best, High, Normal and Basic			
Pre-alarm Recording	YES (8 MB)			
HDD Type	SA	ТА		
	Accommodates 2 SATA HDDs	Accommodates 1 SATA HDD		
HDD Storage	Supports Maximum HDD Capacity to 2	Supports Maximum HDD Capacity to 1		
	Tera Byte	Tera Byte		
HDD Quick Cleaning	Delete HDD Data Efficie	ntly (1TB within 2 seconds)		
Quick Search	Time / Event	/ Full List Mode		
USB Flash Drive Backup	,	YES		
External USB Interfaced Device Backup	,	YES		
DVD Writer Backup	NO	YES		
Playback on PC	Windows Media P	Player compatible		
Network Transfer Format	H.2	64		
Ethernet	10/100 E	Base-T.		
Network Protocol	TCP/IP, PPPOE, DHCP a	and DDNS (Dynamic IP)		
Network Surveillance Interface	Licensed Software AP / IE & Firefox browser (20 users on-line simultaneously)			
Independent Network	Basic Independent			
Network Alarm Notification	E-mail and l	FTP server		
CMS (Central Management System)	YES (Maxmium:	16 different IPs)		
Network E-map Function	Customized map for IP selection			
R.E.T.R. (Remote Event Trigger Recording)	YES			
Operating System for Network Function	Windows Vista / XP / 2000			

IR Remote Control	YES
Multilingual OSD	YES
Motion Detection Area	16 × 12 grids per channel
Motion Detection Sensitivity	4 adjustable parameters for accurate detection
PTZ Control	Pelco-D / Pelco-P / DCC control
External Alarm	4 inputs, 1 output
Picture Zoom	2X digital zoom
Key Lock (Password Protection)	YES
Video Loss Detection	YES
Camera Title	Supports up to 6 letters
Video Adjustable	Hue / Color / Contrast / Brightness
Date Display Format	YY/MM/DD, DD/MM/YY, MM/DD/YY, and Off
Daylight Saving	YES
Power Source (±10%)	DC 19V
Power Consumption	< 42 W
Operating Temperature	10°C ~40°C (50°F~104°F)
Dimensions (mm)**	375(W) × 61 (H) × 281 (D)
System Recovery	System auto recovery after power failure
Optional Peripherals	Keyboard controller
DCC System Function	YES

^{*} The specifications are subject to change without notice.

1.3 Package Contents

☐ Digital video recorder (DVR)	☐ HDD bracket screws (spare parts)
☐ Adapter and power cord	□ DSUB PIN connector
☐ Quick start & IR remote control manual	☐ AAA size battery * 2
☐ CD-ROM (including manual & licensed software "Video Viewer")	

Note: Before using the IR remote control, please install the batteries first.

2. FRONT AND REAR PANELS

2.1 Front Panel

1) LED Indicators

POWER: DVR is powered on.
HDD: HDD is reading or recording
ALARM: Once the alarm is triggered

TIMER: When timer recording is turned on

PLAY: Under playing status

2) MENU

Press "MENU" to enter the main menu.

3) ENTER

Press "ENTER" to confirm the setting.

4) <u>SLOW</u>

Under the playback mode, press "SLOW" to show slow playback.

5) <u>ZOOM</u>

Press "ZOOM" to enlarge the picture of selected channel (under the live mode).

6) 🖽

Press "H" to show the 4 channel display mode.

7) <u>SEQ</u>

Press "SEQ" to activate the call monitor function and press "SEQ" again to escape the call monitor mode.

8) POWER

Press to turn on / off the DVR.

(Under the recording mode, please stop recording before turning off the DVR).

9) <u>CH1 ~ 4</u>

Press the channel number buttons to select the channel to display.

10) <u>PLAY</u>

Press to playback the recorded data.

11) <u>▲ (PAUSE/+) / ▼ (STOP/-) / </u> (REW) / ► (FF)

Press ▲ / ▼ / ◀ / ▶ to move the cursor up / down / left / right.

Under the playback mode, press "PAUSE" to pause playback.

Under the playback mode, press "STOP" to stop playback.

Under the playback mode, press "FF" to fast forward.

Under the playback mode, press "REW" to fast rewind.

12) AUDIO (SLOW + ZOOM)

Press "SLOW" + "ZOOM" simultaneously to select the audio channel you want for listening to the live audio (in the live mode) or playback audio (in the playback mode).

Live audio of the 1st audio channel

Playback audio of the 1st audio channel

Live audio of the 2nd audio channel

Playback audio of the 2nd audio channel

Live audio of the 3rd audio channel

Playback audio of the 3rd audio channel

Live audio of the 4th audio channel

Playback audio of the 4th audio channel

The audio channel is not selected.

13) P.T.Z. (+ SEQ)

Press # + SEQ at the same time to enter / exit the PTZ control mode.

In the PTZ control mode,

* Zoom in: Press "SEQ"

* Zoom out: Press "⊞"

* Adjust PTZ angle: Press ▲ / ▼ / ◀ / ▶

14) LIST (Event List Search)

To quickly search the recorded files by event, press to show all types of the event lists.

15) **SNAP**

Press "SNAP" to take a snapshot.

Note: Before taking a snapshot, insert a compatible USB flash drive into the DVR USB port for snapshot saving. For the compatible USB flash drive list, please refer to "APPENDIX 2 COMPATIBLE USB FLASH DRIVE BRAND" at page 50.

16) <u>EJECT</u> (Selected Models Only)


Press "EJECT" to open / close the DVD Writer.

17) USB

Supports firmware / OSD upgrade and file backup.

2.2 Rear Panel

• 4CH

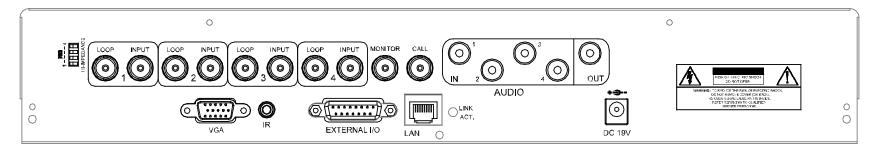

1) 75Ω / HI-IMPEDANCE

When using Loop function, please switch to HI-IMPEDANCE. When you don't use Loop function, please switch to 75Ω .

2) INPUT (1 ~ 4): Connect to video sources, such as cameras.

LOOP (1 ~ 4): Video output connector.

Note: The DVR will automatically detect the video system of the camera, please make sure that the cameras are properly connected to the DVR and power-supplied before the DVR is turned on.

3) MONITOR

Connect to a CRT monitor for video output.

4) CALL

Connect to a call monitor.

5) Audio IN

Connect to audio sources, such as cameras equipped with the audio function.

When users start recording, the audio input will also be recorded with corresponding video channel.

Note: The audio source connected to the "Audio 1" will be recorded with the video of the "CH1".

The audio source connected to the "Audio 2" will be recorded with the video of the "CH2".

The audio source connected to the "Audio 3" will be recorded with the video of the "CH3".

The audio source connected to the "Audio 4" will be recorded with the video of the "CH4".

6) Audio OUT

Connect to a monitor or speaker with 1 mono audio output.

7) <u>VGA</u>

Connect to a LCD monitor directly.

8) <u>IR</u>

Connect the IR receiver extension cable (optional) for remote control.

9) EXTERNAL I/O

Insert the supplied 15 PIN DSUB to this port for connecting external devices (external alarm, etc). For detailed I/O port PIN configuration, please refer to "APPENDIX 1 PIN CONFIGURATION" at page 49.

10) <u>LAN</u>

Connect to Internet with a RJ45 network cable.

11) LINK / ACT LED light:

When the Internet is activated, the LED light will be on.

12) DC 19V

Connect to the supplied adapter.

3. CONNECTIONS AND SETUP

3.1 SATA HDD Installation

The SATA HDDs must be installed before the DVR is turned on.

Note: The following description takes a 4CH DVR model **WITHOUT** a DVD writer built-in as an example. For the 4CH DVR model with a DVD writer built-in, please ignore STEP2.1.

STEP1: Remove the screws on the top cover of DVR, and remove the top cover.

There are two places to install HDDs for this DVR: one is on the right, and the other one is on the left.



STEP2: Turn the DVR real panel facing you.

- 2.1. To install the HDD on the right (For the DVR model without a DVD writer built-in only):
 - a) Find the two HDD brackets in the accessory pack, and fix them onto the DVR base.



b) Get a compatible SATA HDD, and connect it to the power connector and data bus connector.





c) Put the HDD to the DVR, and have the SATA HDD fixed in the DVR.



2.2. To install the HDD on the left side:

a) Remove the HDD bracket as indicated below.



b) Get a compatible SATA HDD. Slide the HDD to the bracket, and fix it with two screws for each side. There are three screw holes per side on the bracket, and you can choose two of them to secure the HDD.





c) Connect the HDD to the power connector and data bus connector.





d) Screw the HDD bracket back to the DVR base.



STEP3: Replace the top cover and fasten the screws you loosened in STEP1.





3.2 Camera Connection

The cameras must be connected and power-supplied before the DVR is turned on. The DVR will automatically detect the video system of the camera when it's powered on.

Note: For detailed DVR video input / output ports, please refer to "2.2 Rear Panel" at page 6. For detailed camera operation, please refer to its own manual.

3.2.1 Normal Camera Connection

Note: For detailed camera installation and connection, please refer to its own user manual.

1) Connecting to power

Connect the camera with indicated power supply.

2) Connecting to DVR video input

Connect the camera video output to the DVR video input port with a coaxial cable, or a RCA cable with BNC connectors.

3) Camera setup

Set the camera title and color. For details, please refer to "7.1.1 Camera" at page 21.

3.2.2 PTZ Camera Connection

Note: For detailed camera installation and connection, please refer to its own user manual.

1) Connecting to power

Connect the camera with indicated power supply.

2) Connecting to DVR video input

Connect the camera video output to the DVR video input port with a coaxial cable, or a RCA cable with BNC connectors.

3) Connecting RS485-A & RS485-B control wires to DVR external I/O port

Solder the RS485-A (brown) and RS485-B (orange) wires of the PTZ camera to the corresponding pins on the solder side of the 15 PIN D-Sub connector (see the figure below).

Note: For the PTZ camera supporting DCCS (DVR Camera Communication System) technology, there's no need to connect RS485 control wires. For details, please refer to "3.2.3 DCCS Camera Connection" at page 10.

RJ11 Cable	PIN Connection
RS485-A: Red wire	RS485-A: PIN 11
RS485-B: Green wire	RS485-B: PIN 10
RJ11 Line RED (RS485-A) GREEN (RS485-B) RJ11 Connector	Solder Side of 15-pin D-Sub connector RS485-A: PIN11 / RS485-B: PIN1 0 8 7 8 8 4 3 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6
The RJ11 cable is not supplied in the sales package.	D-Sub connector is supplied with the DVR package.

To protect the naked wires, use the insulation tape to cover on the twisted wires.

4) Camera setup

Set the camera title, ID, protocol & baud rate. For details, please refer to "7.1.8 Remote" at page 29.

3.2.3 DCCS Camera Connection

Note: For detailed camera installation and connection, please refer to its own user manual.


DCC stands for "DVR Camera Communication", and it's a convenient technology to eliminate the needs to connect RS485 signal wires to the DVR for advanced camera controlling, such as speed dome (PTZ) cameras or zoom lens control cameras.

The advantage of this technology appears when you want to upgrade your home surveillance system from traditional fix cameras to more advanced cameras, such as PTZ cameras or zoom lens cameras.



Typically, these two types of cameras are required RS485 signal wires for more advanced controls, and in order to upgrade your surveillance system, you may need to re-cable or even change your home decoration just for this small purpose.

However, with this technology, why bother to worry? Simply use the current cabling and connect the power cable & video cable. There is no need to re-cable. Upgrading your surveillance system is so easy!



Note: For details about cameras supporting the DCCS function, please check with your distributor or reseller.

1) Connecting to power

Connect the camera with indicated power supply.

2) Connecting to DVR video input

Connect the camera video output to the DVR video input port with a coaxial cable, or a RCA cable with BNC connectors.

Note: For DCCS camera connection, it's not allowed to loop the channel which connects to a DCCS camera to the other channel of this DVR or to other DVR which also supports the DCCS function.

Note: When using the loop function, make sure the resistance on the rear panel is switched to HI-IMPEDANCE. For details, please refer to "2.2 Rear Panel" at page 6.

3) Configuring camera parameters (For zoom lens control cameras only)

Set the camera parameters. For details, please refer to "7.1.8 Remote" at page 29.

3.3 Power Setup

This device should be operated only with the type of power source indicated on the manufacturer's label. Connect the indicated AC power cord to the power adapter, and plug into an electrical outlet. Press "POWER", and the LED "U" will be on.

Note: To ensure that your DVR works constantly and properly, it's recommended to use an UPS, Uninterruptible Power Supply, for continuously operation. (Optional)

3.4 Date and Time Setting


Note: Please DO NOT change the date or time of your DVR after the recording function is activated. Otherwise, the recorded data will be disordered and you will not be able to find the recorded file to backup by time search. If users change the date or time accidentally when the recording function is activated, it's recommended to clear all HDD data, and start recording again.

Note: For the first time to use the DVR, please charge the DVR for at least 48 hours continuously after the date & time is set correctly.

Before operating your DVR, please set the date and time on your DVR FIRST

Press "MENU" and enter the password to go to the quick-start menu list. The default admin password is 0000.


Move to , and you can set the date / time / daylight saving in this menu list.

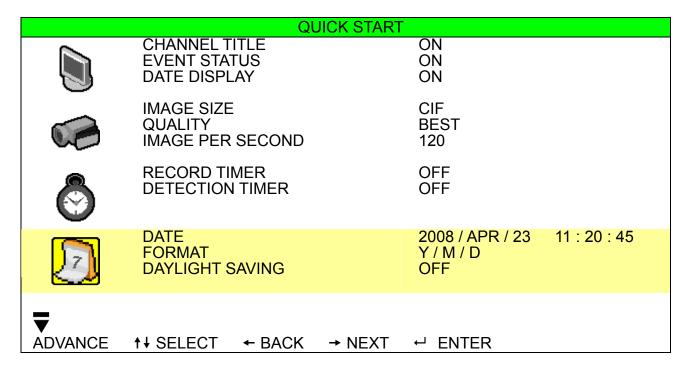

3.5 Password Setting

Press "MENU" and enter the password to go to the quick-start menu list. Then, move to "ADVANCE" to enter the advanced setting menu.

In the "ADVANCE" menu, move to "SYSTEM INFO). Select "PASSWORD" and press "ENTER" to enter the submenu to set the password (four digits). The default admin password is 0000.

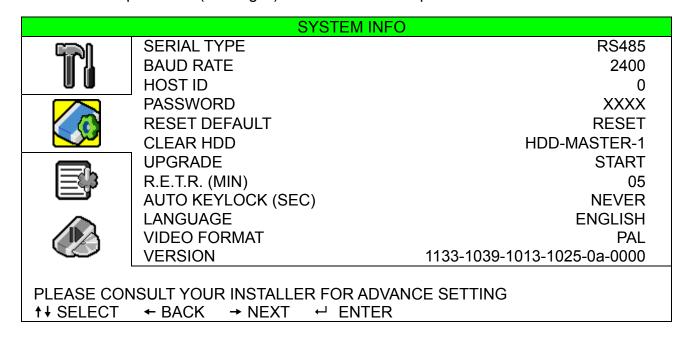

4. BASIC OPERATION

4.1 Live Page

In this live page of the DVR, you can see the live viewing of 1- / 4-cut screen.



lcon	Function	Icon	Function	Icon	Function	Icon	Function
A	Key lock		Key unlock		The 1 st live audio		The 2 nd live audio
	Troy look		rtoy amoon	Ve	channel	ve	channel
(3))	The 3 rd live audio	4))	The 4 th live audio	od m	The 1 st playback	(Cam)	The 2 nd playback
ve	channel	ve	channel	live audio	audio channel	(2))) ay	audio channel
(3))) ay	The 3 rd playback	(4))) ay	The 4 th playback		Audio channel	•	Digital zoom mode
May	audio channel	Qay	audio channel	®	unselected	-	Digital 20011 Hode
⊕_	Digital zoom		Timer recording	€	Motion	Ž	Recording
7	unselected	\bigcirc	Timer recording	77	IVIOLIOIT	3	Recording
@0	Alarm	7	HDD overwritten	R.E.	R.E.T.R. ON	R.E.	R.E.T.R. Delay
				T.R.		T.R.	2014,

4.2 Recording

1) Manual Recording Icon

By defaults, when the DVR is properly connected with cameras and the HDD is installed, you can see "F" (recording) on the screen.

2) Event Recording Icon

When the motion / alarm detection is activated, you will see "\overline{b}" (motion) or "\overline{b}" (external alarm) on the screen for any motion / alarm event.

3) <u>Timer Recording Icon</u>

When the timer record is activated, you will see the LED light of "Timer" is on, and "O" (timer) on the screen.

4) HDD Overwritten Icon

The HDD overwritten function can be set to ON / OFF. When this function is enabled (ON), the icon will display on the monitor screen.

When the HDD overwritten function is activated and the HDD is nearly full, this device will overwrite 8GB data from the oldest for continuous recording without notice.

Note: A new log will be added in the system log when the HDD data is overwritten, or the recording starts after DVR reboots.

4.3 Playback

Press "PLAY" on the DVR control panel, and the device will playback the latest recorded video.

Note: There must be at least 8192 images of recorded data for playback to work properly. If not, the device will stop playback. For example, if the IPS is set to 30, the recording time should be at least 273 seconds (8192 images / 30 IPS) for the playback to work properly.

Note: The playback at the local site might not be so fluent if there's any remote surveillance simultaneously going on.

1) Fast Forward / Fast Rewind

You can increase the speed for fast forward and rewind on this device. In the playback mode:

Press "FF" once to get 4X speed forward and press twice to get 8X speed, etc. And the maximum speed is 32X. Press "REW" once to get 4X speed rewind and press twice to get 8X speed, etc. And the maximum speed is 32X.

Note: During playback, the image size of the recording (FRAME, FIELD or CIF) will be shown on the screen.

2) Pause / Image Jog

Press "PAUSE" to pause the playback.

In the Pause mode:

Press "FF" once to get one frame forward.

Press "REW" once to get one frame rewind.

3) Stop

Press "STOP" under playback mode, and the screen will return to live monitoring mode.

4) Slow Playback

Press "SLOW" to get 1/4X speed playback and press twice to get 1/8X speed playback.

5) Audio Playback

In the playback mode, press "SLOW" + "ZOOM" to select the audio channel you want for audio playback.

- Playback audio of the 1st audio channel
- Playback audio of the 2nd audio channel
- Playback audio of the 3rd audio channel
- Playback audio of the 4th audio channel
- The audio channel is not selected.

Note: If you want to make a video backup with audio, please connect audio cameras to the channels which support the audio function (CH1, CH2, CH3 and CH4).

4.4 Key Lock and Unlock

1) Key Lock On

Set the time-out after which the key lock function is activated (NEVER / 10 SEC / 30 SEC / 60 SEC). Please refer to "7.2 System Info" at page 30.

OR

Press "F2" on the IR remote controller to immediately lock the keys.

2) Key Lock Off

Enter the DVR password to exit "Key Lock" mode.

Note: For the password setting, please refer to "3.5 Password Setting" at page 11.

4.5 Upgrade

Firmware / Multilanguage OSD Upgrade

1) Use USB to upgrade firmware or OSD

- Step 1. Format the USB memory device as FAT 32 format first.
- Step 2. Get the upgrade files from your distributor, and save the upgrade files in your USB flash device (do not change the file name).
- Step 3. Insert your USB flash drive into the USB port. Wait till the DVR detects your USB flash drive.
- Step 5. Select "YES", and press "ENTER" to confirm the upgrade.

2) <u>Use the licensed software "Video Viewer" to remotely upgrade firmware or OSD</u>

- Step 1. Save the upgrade files at your PC (do not change the file name), and execute Video Viewer.
- Step 2. In the "Address Book" panel, select the IP address of your DVR (or add the IP address of your DVR to the address book if it's not yet in the address book), and click "Some to show the "Update Server" panel.
- Step 3. In "Update Server", click "Firmware" or "Language" tab as needed, and click "Add" to select the firmware or OSD files to upgrade.
- Step 4. Click "Update Firmware" or "Update Language" to start the upgrade.

4.6 Search

1) Search by List

Press "LIST" on the DVR control panel to show the list for all types of the recorded files. Choose the item you want to see, and press "ENTER" to start playback.

2) Search by Time

In the " (EVENT INFO) menu list, move to "QUICK SEARCH", and press "ENTER" to enter the quick search menu. You can search any specific events by time (Year / Month / Day / Hour / Min) and directly play the file you find.

5. MAIN MENU

5.1 Menu Configuration

		·	
l		STATUS	CHANNEL TITLE
			EVENT STATUS
			DATE DISPLAY
			IMAGE SIZE
		RECORD	QUALITY
QUICK START MENU			IMAGE PER SECOND
			RECORD TIMER
		TIMER	DETECTION TIMER
			DATE
	7	DATE	FORMAT
	<u></u>	DAYLIGHT SA	DAYLIGHT SAVING
			CAMERA
			DETECTION
			ALERT
	<u>الرا لا</u>	ADVANCE CONFIG	NETWORK
		718 WINGE COM 10	SNTP
			DISPLAY
			RECORD
			REMOTE
			SERIAL TYPE
			BAUD RATE
			HOST ID
			PASSWORD
ADVANCED MENU			RESET DEFAULT
ABVANGED MENO		SYSTEM CONFIG	CLEAR HDD
			UPGRADE
			R.E.T.R. (MIN)
			AUTO KEYLOCK (SEC)
			LANGUAGE
			VIDEO FORMAT
			VERSION
			QUICK SEARCH
	EVENT LOG	EVENT SEARCH	
		HDD INFO	
			EVENT LOG
	BACKUP	BACKUP	USB BACKUP
	27.01.01		DISK BACKUP (Selected Models Only)

5.2 Menu Operation Instruction

ITEM	FUNCTION
QUICK START MENU:	View & change the settings of the quick start menu items.
MENU	Enter / exit the quick start menu
▲ ▼	Make the selection / Change the setting
4	Go to the upper layer or sub-layer / Make the selection
ENTER	Confirm the password entering
▼ ADVANCED MENU:	In the quick start menu, move to "▼", and press "▼" to enter the advanced setting menu.
ENTER	Go to the sub-layer of the advanced menu
MENU	Under the sub-layer of the advanced setting menu, use this button to confirm the settings and go back to the upper layer.
→ NEXT	Move to this item and press ENTER to go the next page.
← BACK	Move to this item and press ENTER to go the previous page.
	Other operations in the advanced menu are the same as in the quick start menu.


6. QUICK START MENU

Press MENU" and enter the password to go to the quick-start menu list. The default admin password is 0000. Users can change the password later. Please refer to the section "7.2 System Info" at page 30.

6.1 Status

In this menu list, you can check and change some display settings.

Move to , and you will see the following screen:

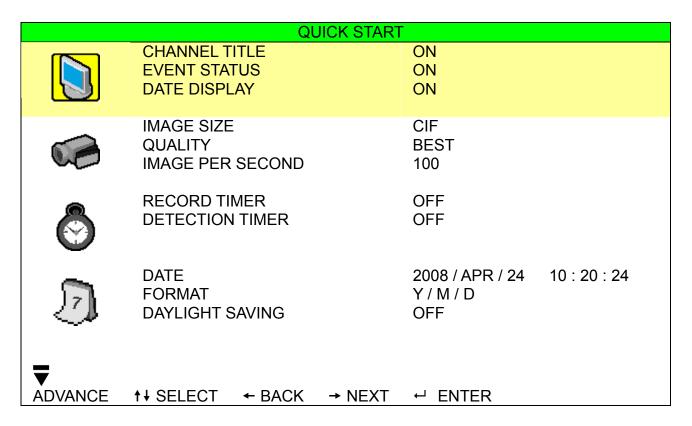

The submenu items are described below:

1) CHANNEL TITLE

Select to display the channel title or not (ON / OFF).

2) EVENT STATUS

Select to display the symbols of the event or not (ON / OFF).

3) DATE DISPLAY

Select to display the date or not (ON / OFF).

6.2 Manual Record

In this menu list, you can set record settings.

Move to , and you will see the following screen:

	QUICK START						
	CHANNEL TITLE EVENT STATUS DATE DISPLAY	ON ON ON					
	IMAGE SIZE QUALITY IMAGE PER SECOND	CIF BEST 100					
③	RECORD TIMER DETECTION TIMER	OFF OFF					
	DATE FORMAT DAYLIGHT SAVING	2008 / APR / 24 10 : 29 : 00 Y / M / D OFF					
▼ ADVANCE	↑↓ SELECT ← BACK →	NEXT ← ENTER					

The submenu items are described below:

1) IMAGE SIZE

Select one of the image sizes: FRAME, FIELD or CIF.

2) QUALITY

Select one of the 4 quality options: SUPER BEST, BEST, HIGH & NORMAL.

3) IMAGE PER SECOND


Select the images per second for MANUAL RECORD.

NTSC	IPS	PAL	IPS
FRAME	3, 7, 15, 30	FRAME	3, 6, 12, 25
FIELD	7, 15, 30, 60	FIELD	6, 12, 25, 50
CIF	15, 30, 60, 120	CIF	12, 25, 50, 100

6.3 Timer

In this menu list, you can schedule different sets of time for recording and detection function.


Move to , and you will see the following screen:

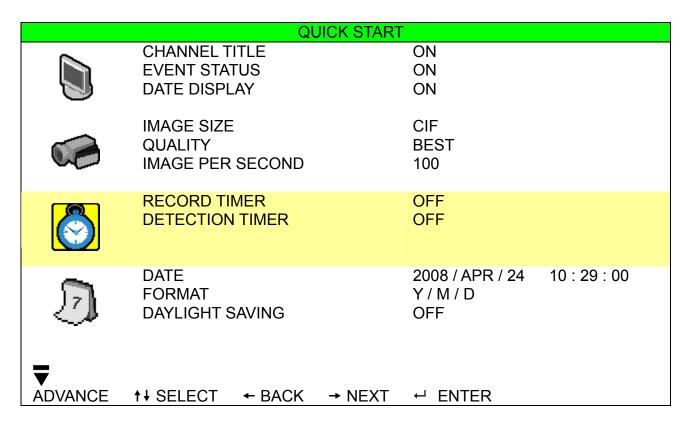

The submenu items are described below:

1) RECORD TIMER

Use ▲ / ▼ to change the setting (ON / OFF). When it's set to "ON", press "ENTER" to go to its submenu for further settings.

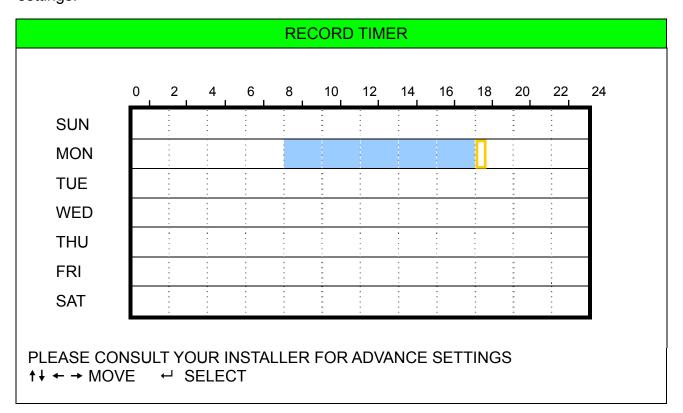

X axis 0 ~ 24 hours. Each time interval within a square is two hours (divided into four 30-minutes).


Y axis Monday ~ Sunday.

Operation Move to the start time point, and press enter to set the start time point (marked in red color).

Then, press ▲ / ▼ / ◀ / ▶ to set the timer-recording schedule. After setup, press "ENTER" again to create an ending time point (marked in yellow color) and press "MENU" to exit.

2) <u>DETECTION TIMER</u>

Use ▲ / ▼ to change the setting (ON / OFF). When it's set to "ON", press "ENTER" to go to its submenu for further settings.

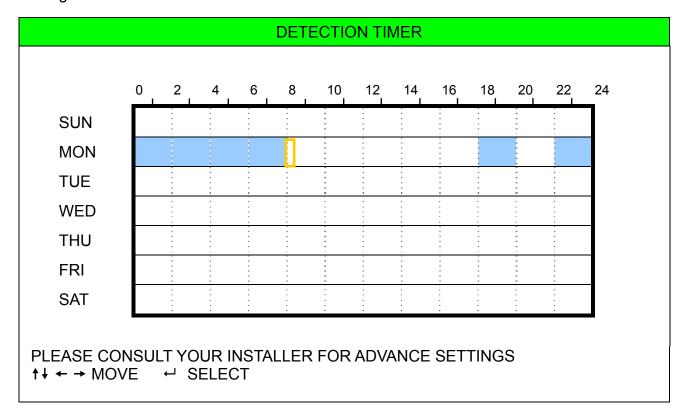

X axis 0 ~ 24 hours. Each time interval within a square is two hours (divided into four 30-minutes).

Y axis Monday ~ Sunday.

Operation Move to the start time point, and press enter to set the start time point (marked in red color).

Then, press ▲ / ▼ / ◀ / ▶ to set the timer-recording schedule. After setup, press "ENTER" again to create an ending time point (marked in yellow color) and press "MENU" to exit.

Note: This function here is only for detection timer setup and activation. For motion detection function setup and activation, please refer to section "7.1.2 Detection" at page 22.


6.4 Date

In this menu list, you can set up the system date and time for this device.

Note: Please DO NOT change the date or time of your DVR after the recording function is activated. Otherwise, the recorded data will be disordered and you will not be able to find the recorded file to backup by time search. If users change the date or time accidentally when the recording function is activated, it's recommended to clear all HDD data, and start recording again.

Note: For the first time to use the DVR, please charge the DVR for at least 48 hours continuously after the date & time is set correctly.

Press "MENU" to enter the main menu list. Move to , and you will see the following screen:

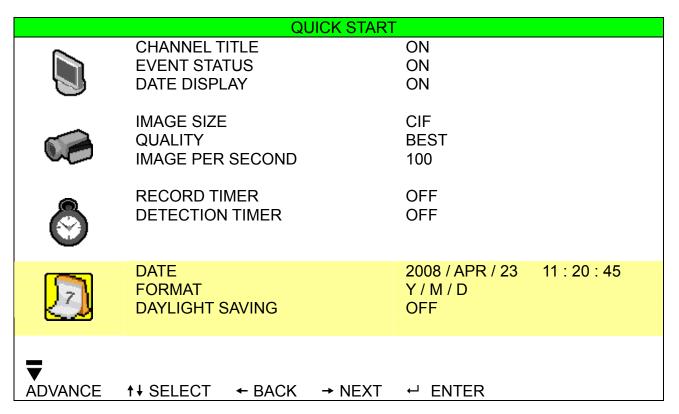

The submenu items are described below:

1) <u>DATE</u>

Set the current date and time. The default order is "YEAR – MONTH – DATE HOUR: MIN: SEC".

2) FORMAT

Select one date format from the following 3 options: Y-M-D, M-D-Y, D-M-Y.

3) DAYLIGHT SAVING

Use the ▲ / ▼ to specify whether to use daylight-saving time (ON / OFF). When it's set to "ON", press "ENTER" to go to its submenu for further settings.

DAYLIGHT SAVING				
START TIME END TIME ADJUST	4TH - SUN - MAR 4TH - SUN - OCT			
PLEASE CONSULT YOUR INSTALLER FOR A ↑↓ SELECT ← BACK → NEXT ← EN				

Set the start time and end time, and adjust the daylight saving time in hour. The above example means during the daylight-saving time period (starting from the 4th Sunday of March and ending on the 4th Sunday of October), the system time will plus one hour. After setup, press "ENTER" again to create an ending time point and press "MENU" to exit.

7. ADVANCED MENU


Press "MENU" and enter the password to go to the quick-start menu list. Then, move to "ADVANCE" to enter the advanced setting menu. The default admin password is 0000. Users can change the password later. Please refer to the section "7.2 System Info" at page 30.

It is recommended that consult your installer to setup this advanced menu.

7.1 Advanced Configuration

In this menu list, you can check or change CAMERA / DETECTION / ALERT / NETWORK / SNTP / DISPLAY / RECORD / REMOTE settings.

Move to "T", and you will see the following screen:

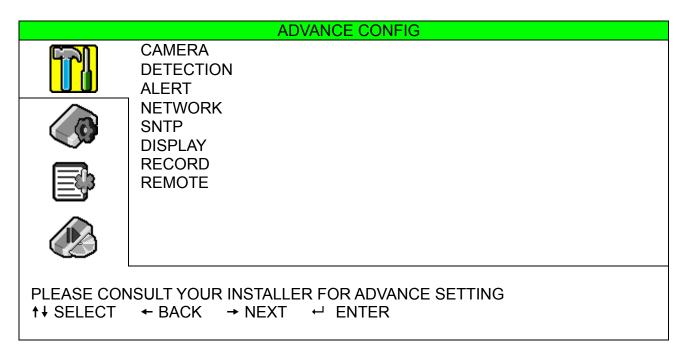

7.1.1 Camera

In this submenu, you can make advanced camera settings, such as changing the camera title, or adjust the brightness. Move to "CAMERA", and press "ENTER". You will see the following screen:

			CAMERA	4		
TITLE	BRIG	CONT	SATU	HUE	COV.	REC
CH1	128	098	128	128	OFF	ON
CH2	128	098	128	128	OFF	ON
CH3	128	098	128	128	OFF	ON
CH4	128	098	128	128	OFF	ON
DI EASE CONSULT VOLID INISTALLED FOR ADVANCE SETTING						
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER						

The submenu items are described below. While you changing the camera setting, you can *preview* the changing on the screen.

1) TITLE

You can change the default camera naming here. The default title is the channel number.

Move to the camera title you want to change, and press "ENTER" on the control panel of the DVR to access the character selection screen. Assign a new name to the camera up to six characters (letters or symbols or numbers).

2) BRIG / CONT / SATU / HUE

You can adjust the brightness/contrast/saturation/hue of each channel here. The value is adjustable from 0 to 255.

3) <u>COV</u>

Select if you want to mask the selected channel under recording (ON / OFF). When this function is activated, the wording "COV." will be shown on the channel screen.

Note: To hide the wording "COV." When this function is on, please go to "DISPLAY", and set "DISPLAY COVERT" to "OFF". For details, please refer to "7.1.6 Display" at page 27.

4) <u>REC</u>

7.1.2 Detection

In this submenu, you can set up detection-related functions.

Move to "DETECTION", and press "ENTER". You will see the following screen:

DETECTION							
TITLE	DET	AREA	LS	SS	TS	RE	ALARM
CH1	OFF	SETUP	07	03	02	10	OFF
CH2	OFF	SETUP	07	03	02	10	OFF
CH3	OFF	SETUP	07	03	02	10	OFF
CH4	OFF	SETUP	07	03	02	10	OFF
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER							

The submenu items are described below:

1) TITLE

Show the camera title of each channel set in "CAMERA".

2) <u>DE</u>T

Select if you want to activate the motion detection function for the selected channel (ON/OFF).

3) AREA

There are 16 × 12 grids per camera for all channels. Pink blocks represent the area that is not being detected while the transparent blocks are the area under detection.

Press "ENTER" on the control panel of the DVR to set the detection area. You will see similar screens as the following:



Transparent blocks are the area under detection.



Press "ENTER" to confirm the start area.



Press ◀ / ▶ to choose the width of the area



Press ▲ / ▼ to choose the height of the area.



You can also set up multi-detection



When a motion alarm is triggered, you will see the grids are flashing.

4) LS (Level of Sensitivity)

"LS" is to set the sensitivity of comparing two different images. The smaller the value is, the higher sensitivity for motion detection. The highest sensitivity setting is 00, and the lowest sensitivity setting is 15. The default value is 07.

5) SS (Spatial Sensitivity)

"SS" is to set the sensitivity for detecting the size of one object (the number of the grids) on the screen. The smaller the value is, the higher sensitivity for motion detection.

The highest sensitivity setting is 00, and the lowest sensitivity setting is 15. The default setting is 03.

Note: The default setting of SS is 03, which means once an object is detected more than 3 grids, the system will get triggered. So the value of SS must be less than the number of grids that you set up for the motion detection area.

6) TS (Time of Sensitivity)

"TS" is to set the sensitivity regarding how long one object stays in the detection area and triggers the recording. The smaller the value is, the higher sensitivity for motion detection.

The highest sensitivity setting is 00, and the lowest sensitivity setting is 15. The default setting is 02.

7) RE (Reference)

"RE" is to set a reference for detection. The default value is 10, which means the DVR will compare 10 continuous images at one time according to the sensitivity of LS, SS, TS simultaneously.

The bigger the value is, the higher sensitivity for motion detection. The highest sensitivity is 61.

8) ALARM

Select N.C./ N.O. for the alarm polarity. The default alarm value is OFF.

7.1.3 Alert

In this menu list, you can set alerts for different kinds of situations, such as when HDD is full. Move to "ALERT", and press "ENTER". You will see the following screen:

ALERT	
EXT. ALERT INT. BUZZER KEY BUZZER VLOSS BUZZER MOTION BUZZER ALARM BUZZER HDD BUZZER ALARM DURATION (SEC)	ON ON ON ON ON ON ON
HDD NEARLY FULL (GB) PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING	05
↑ SELECT ← BACK → NEXT ← ENTER	

The submenu items are described below:

1) EXT. ALERT

Select to enable or disable the sound when any external alarm is triggered (ON / OFF).

2) INT. BUZZER

Select to enable or disable the sound (ON / OFF) for all the internal buzzers: KEY BUZZER, VLOSS BUZZER, MOTION BUZZER, and ALARM BUZZER.

Note: When this item is set to OFF, item 3) to item 6) will be disabled even though they are set to ON.

3) KEY BUZZER

Select to enable or disable the sound when pressing the buttons on the front panel (ON / OFF).

4) VLOSS BUZZER

Select to enable or disable the sound when video loss happened (ON / OFF).

5) MOTION BUZZER

Select to enable or disable the sound when any motion alarm is triggered (ON / OFF).

6) ALARM BUZZER

Select to enable or disable the sound when any internal alarm is triggered (ON / OFF).

7) HDD BUZZER

Select to enable or disable the sound (ON / OFF) when the HDD remaining capacity reaches to the value set in "HDD NEARLY FULL (GB)".

8) ALARM DURATION (SEC)

Press ▲ / ▼ to set the duration time of alarm recording in second (5 / 10 / 20 / 40).

9) HDD NEARLY FULL (GB)

If HDD BUZZER is enabled, press ▲ / ▼ to have a buzzer notification when the HDD available capacity is 5/10/15/20 GB left.

7.1.4 Network

In this menu list, you can set up the network.

Move to "NETWORK", and press "ENTER" to enter the submenu. You will see the following screen:

NETWO)RK
NETWORK TYPE	STATIC
IP	192 . 168 . 001 . 080
GATEWAY	192 . 168 . 001 . 080
NETMASK	255 . 255 . 255 . 000
PRIMARY DNS	168 . 095 . 001 . 001
SECONDARY DNS	139 . 175 . 055 . 244
PORT	0080
PLEASE CONSULT YOUR INSTALLER ↑↓ SELECT ← BACK → NEXT	

The submenu items are described below:

· STATIC

1) NETWORK TYPE

Select the network type as STATIC and set all the information needed in the DVR.

NETWORK INFORMATION (IP / GATEWAY / NETMASK)

Key in all the network information obtained from your ISP (Internet Service Provider).

3) DNS (PRIMARY DNS / SECONDARY DNS)

Key in the IP address of the domain name server obtained from your ISP (Internet Service Provider).

4) PORT

The valid number ranges from 1 to 9999. The default value is 80. Typically, the TCP port used by HTTP is 80. However in some cases, it is better to change this port number for added flexibility or security. See the example below:

dec the example below.						
STATIC						
NETWORK TYPE	STATIC					
IP	192 . 168 . 001 . 080					
GATEWAY	192 . 168 . 001 . 080					
NETMASK	255 . 255 . 255 . 000					
PRIMARY DNS	168 . 095 . 001 . 001					
SECONDARY DNS	139 . 175 . 055 . 244					
PORT	0080					
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING						
↑ SELECT ← BACK → NEXT ← E	ENTER					

PPPOE

1) NETWORK TYPE

Select the network type as PPPOE.

2) <u>USER NAME / PASSWORD</u>

Set "username" and "password" subscribed from your ISP supplier

3) DNS (PRIMARY DNS / SECONDARY DNS)

Key in the IP address of the domain name server obtained from your ISP (Internet Service Provider).

4) <u>PORT</u>

The valid number ranges from 1 to 9999. The default value is 80. Typically, the TCP port used by HTTP is 80. However in some cases, it is better to change this port number for added flexibility or security. See the example below:

	PPPOE
NETWORK TYPE	PPPOE
USER NAME	ac123456
PASSWORD	tech123456
IP	000 . 000 . 000 . 000
GATEWAY	000 . 000 . 000 . 000
NETMASK	000 . 000 . 000 . 000
PRIMARY DNS	168 . 095 . 001 . 001
SECONDARY DNS	139 . 175 . 055 . 244
PORT	0800
PLEASE CONSULT YOUR INSTAL ↑↓ SELECT ← BACK → NEX	

Note: The PPPOE function needs to have one "username" and one "password" subscribed from one ISP supplier and a "DDNS account" to transforming the dynamic IP corresponding to a specific "Hostname".

· DHCP

1) NETWORK TYPE

Select the network type as DHCP.

2) DNS (PRIMARY DNS / SECONDARY DNS)

Key in the IP address of the domain name server obtained from your ISP (Internet Service Provider).

3) PORT

The valid number ranges from 1 to 9999. The default value is 80. Typically, the TCP port used by HTTP is 80. However in some cases, it is better to change this port number for added flexibility or security.

See the example below:

DHCP	
NETWORK TYPE	DHCP
IP CATEMAN	000 . 000 . 000 . 000
GATEWAY	000 . 000 . 000 . 000
NETMASK PRIMARY DNS	000 . 000 . 000 . 000
SECONDARY DNS	168 . 095 . 001 . 001 139 . 175 . 055 . 244
PORT	0080
PLEASE CONSULT YOUR INSTALLER FOR AD ↑↓ SELECT ← BACK → NEXT ← ENTE	

Note: This DHCP function needs to be supported by a router or a cable modem network with DHCP services and a "DDNS account" to transforming the dynamic IP corresponding to a specific "Hostname".

7.1.5 SNTP

In this menu list, you can set to synchronize your DVR time with the networked computer systems.

Note: Before using this function, please connect your DVR to Internet.

Move to "SNTP", and press "ENTER" to enter the submenu. You will see the following screen:

SN	ITP
GMT NTP SERVER SYNC PERIOD	(GMT+08:00) TAIPEI tock.stdtime.gov.tw DAILY
PLEASE CONSULT YOUR INSTALLER ↑↓ SELECT ← BACK → NEXT ←	

1) GMT

Select your time zone. There are 75 time zones for you to choose.

2) NTP SERVER

Users can change the default NTP server to another server they're familiar with.

3) SYNC PERIOD

Select to synchronize the DVR time everyday (DAILY), or turn this function off (OFF).

7.1.6 Display

In this menu list, you can set up the settings of display.

Move to "DISPLAY", and press "ENTER" to enter the submenu. You will the following screen:

DISPLAY	
DE-INTERLACE	ON
FULL SCREEN DWELL DURATION (SEC)	03
VGA OUTPUT	1024 x 768
DISPLAY COVERT	ON
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE S ↑↓ SELECT ← BACK → NEXT ← ENTER	ETTING

The submenu items are described below:

1) <u>DE-INTERLACE</u>

Select to enable or disable the de-interlace function (ON / OFF).

Note: If you set the recording image size as "FRAME", please TURN ON de-interlace function. If you set the recording image size as "CIF", please TURN OFF the de-interlace function.

2) FULL SCREEN DWELL DURATION (SEC)

Set the full screen dwell duration time (3 / 5 / 10 / 15 seconds).

3) VGA OUTPUT

Select the VGA output resolution. There are seven options for your choice: $800 \times 600 / 1024 \times 768$ (default) / $1280 \times 1024 / 1440 \times 900 / 1400 \times 1050 / 1680 \times 1050 / 1600 \times 1200$

Note: To have the best image quality on your LCD monitor, make sure (1) the selected DVR VGA output resolution is supported by your monitor, and (2) the VGA output settings on both the LCD monitor and DVR are consistent.

If the image is not positioned or scaled properly, please go to your monitor's menu for adjustment. For details, please refer to the user manual of your LCD monitor.

4) DISPLAY COVERT

To hide the wording "COV." when the covert recording is set to on, select "OFF". The default value is "ON".

7.1.7 Record

In this menu list, you can set up the settings of display.

Note: Please DO NOT change the date or time of your DVR after the recording function is activated. Otherwise, the recorded data will be disordered and you will not be able to find the recorded file to backup by time search. If users change the date or time accidentally when the recording function is activated, it's recommended to clear all HDD data, and start recording again.

Move to "RECORD", and press "ENTER" to enter the submenu. You will the following screen:

RECORD	
MANUAL RECORD ENABLE	ON
EVENT RECORD ENABLE	ON
TIMER RECORD ENABLE	ON
EVENT RECORD IPS	100
TIMER RECORD IPS	100
PRE-ALARM RECORD	ON
OVERWRITE	ON
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER	3

The submenu items are described below:

1) MANUAL RECORD ENABLE

Set the manual recording function on / off.

2) EVENT RECORD ENABLE

Set the event recording function on / off.

3) TIMER RECORD ENABLE

Set the timer recording function on / off.

4) EVENT RECORD IPS

Select the images per second for EVENT RECORD (Recording that is triggered by alarm or motion).

NTSC	IPS	PAL	IPS
FRAME	3, 7, 15, 30	FRAME	3, 6, 12, 25
FIELD	7, 15, 30, 60	FIELD	6, 12, 25, 50
CIF	15, 30, 60, 120	CIF	12, 25, 50, 100

5) <u>TIMER RECORD IPS</u>

Select the images per second for TIMER RECORD (Recording that is activated according to the scheduled time).

NTSC	IPS	PAL	IPS
FRAME	3, 7, 15, 30	FRAME	3, 6, 12, 25
FIELD	7, 15, 30, 60	FIELD	6, 12, 25, 50
CIF	15, 30, 60, 120	CIF	12, 25, 50, 100

6) PRE-ALARM RECORD

Select to enable or disable the pre-alarm function (ON / OFF).

When pre-alarm and event recording functions are both activated, the DVR will record 8MB data before any alarm / motion is triggered.

7) OVERWRITE

Select "ON" to overwrite previous recorded data in your HDD when the HDD is full. When this function is on and the HDD is full, the DVR will clear 8GB data from the oldest for continuous recording without notice.

7.1.8 Remote

In this menu list, you can set the connected PTZ camera to be controllable by this DVR.

Move to "REMOTE", and press "ENTER". You will see the following screen:

REMOTE						
TITLE	DEVICE	ID	PROTOCOL	RATE		
CH1	PTZ	000	NORMAL	2400		
CH2	AVK145C	000	NORMAL	2400		
CH3	CAMERA	000	NORMAL	2400		
CH4	CAMERA	000	NORMAL	2400		
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING						
↑↓ SELECT ← BACK → NEXT ← ENTER						

The submenu items are described below:

1) TITLE

Show the camera title of each channel set in "CAMERA".

2) DEVICE

For the PTZ camera: Select "PTZ".

For zoom lens control cameras:

The DVR will detect it automatically and display its model number here, for example, AVK145C for CH2.

Note: DCCS stands for "DVR Camera Communication System", and it's a convenient technology to eliminate the needs to connect RS485 signal wires to the DVR for advanced camera controlling, such as PTZ or zoom lens cameras.

Simply connect the power cable & video cable, and you can control via the DVR quickly.

To configure the parameters for a zoom lens control camera, move to this item, and press "ENTER". You will see the parameter-setting page. Different zoom lens control cameras might have different parameter settings. For details, please refer to their own user manuals.

Note: While configuring the camera parameters, the DVR will switch to the corresponding channel, and you can simultaneously preview the effects for the settings.

3) <u>ID</u>

Set the ID number (0 ~ 255) for the connected PTZ camera.

Make sure the ID setting of the camera is the same as the setting here, or the DVR will not be able to control the device.

Note: To know the default ID of the PTZ camera, please refer to its user manual.

4) PROTOCOL

Select NORMAL (our protocol), P-D (PELCO-D) or P-P (PELCO-P) protocol.

5) RATE

Set the baud rate for the connected PTZ camera (2400 / 4800 / 9600 / 19200 / 57600 / 115200).


Make sure the baud rate setting of the camera is the same as the setting here, or the DVR will not be able to control the device.

Note: To know the default baud rate of the PTZ camera, please refer to its user manual.

7.2 System Info

In this menu list, you can check or change some system settings.

Move to "O", and you will see a similar screen as the following:

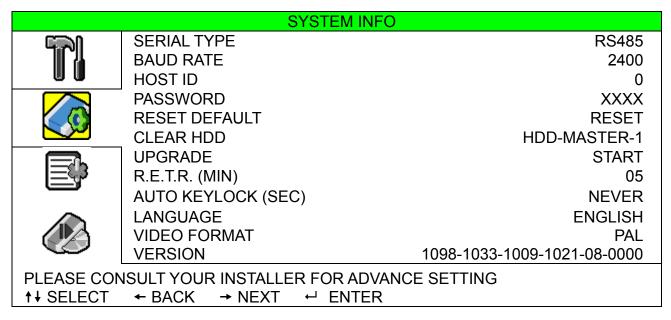

The submenu items are described below:

1) SERIAL TYPE

Here shows the serial type of the DVR (RS-485).

2) BAUD RATE

Set the baud rate of the DVR (2400 / 9600 / 19200 / 38400 / 57600).

3) HOST ID

Set the ID of the DVR (0 \sim 254).

4) <u>PASSWORD</u>

Reset the password for accessing the DVR system. You can set the password up to 4 digits.

5) RESET DEFAULT

Press "ENTER" to reset all settings as default, and select "YES" to confirm or "NO" to cancel.

6) CLEAR HDD

Press ▲ / ▼ to select the HDD you want to clear. Press "ENTER", and select "YES" to confirm to clear HDD or "NO" to cancel.

7) UPGRADE (For upgrading firmware / OSD)

Before using the USB flash drive, please use your PC to format the USB flash drive to FAT32 format first. Save the upgrade file in a compatible USB flash drive, and insert it into the USB port at the front panel. Then, press "ENTER" and select "YES" to confirm upgrade or "NO" to cancel.

Note: For the list of compatible USB flash drives, please refer to "APPENDIX 2 COMPATIBLE USB FLASH DRIVE BRAND" at page 50.

8) R.E.T.R. (MIN)

Select the timeout after which the R.E.T.R. function will be activated (03 / 05 / 10 / 30).

· R.E.T.R. On

Press the R.E.T.R. key on the IR remote controller to enable the timeout function. Key in the password, and the R.E.T.R. delay icon "IR" (in green background) will be shown on the screen. When the RETR function is activated, the R.E.T.R. on icon "IR" (in red background) will be shown on the screen.

· R.E.T.R. Off

Press any key (except "POWER") and enter the password to turn off the RETR function.

9) AUTO KEYLOCK

Set the time-out in second after which the key lock function is activated (NEVER / 10 / 30 / 60).

10) LANGUAGE (Multilingual OSD)

Select the language of the OSD.

11) VIDEO FORMAT

Here shows the information of the DVR video format (NTSC / PAL).


12) VERSION

Here shows the firmware version information.

7.3 Event Info

In this menu list, you can quickly search the recorded file by time or event, and check all the HDD and event information (event type, time and channel).

Move to "F", and press "ENTER". You will the following screen:

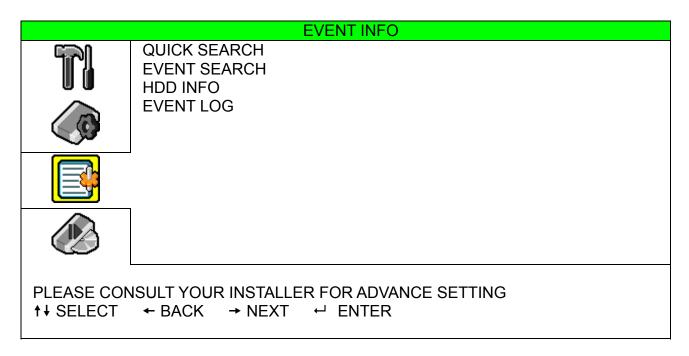

7.3.1 Quick Search

In this menu list, you can search any specific events by time and directly play the file you find. Move to "QUICK SEARCH", and press "ENTER". You will see a similar screen as the following:

TIME SEARCH					
DATE SEARCH HDD START	2008 / APR / 24	22 : 48 : 00 ALL HDD			
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER					

The submenu items are described below:

1) <u>DATE</u>

Select the specific time period (YEAR / MONTH / DAY / HOUR / MIN) that you want to search.

2) SEARCH HDD

Change to the HDD you want to search if there are more than one HDD in your DVR by pressing ▲ / ▼.

3) START

Move to "START" and press "ENTER" to search and directly playback the recorded files.

7.3.2 Event Search

Move to "EVENT SEARCH", and press "ENTER". You will see the following screen:

EVENT SEARCH					
DATE CHANNEL EVENT	2008 / JUN / 17	22 : 48 : 00 01 MOTION			
SEARCH HDD START		ALL HDD			
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER					

The submenu items are described below:

1) <u>DATE</u>

Set the date and time you want to search for events.

2) CHANNEL

Press ▲ / ▼ to select the channel.

3) EVENT

Select the event type: MOTION or ALARM.

4) SEARCH

Change to the HDD you want to search if there are more than one HDD in your DVR by pressing \blacktriangle / \blacktriangledown .

5) START

Move to "START" and press "ENTER" to search and directly playback the recorded files.

Note: The file found will be played with the fast speed.

7.3.3 HDD Info

In this menu list, you can view the remaining capacity of all the connected HDDs in this device. Move to "HDD INFO", and press "ENTER". You will see a similar screen as the following:

HDD INFO					
HDD NUM	HDD SIZE (GB)	HDD NUM	HDD SIZE (GB)		
HDD-MASTER-1 HDD-MASTER-2	233 NO HDD	HDD-SLAVE-1 DISK-RW	NO HDD NO DISK		
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER					

7.3.4 Event Log


In this menu list, you can view all the event information (event type, time and channel) or clear all log records. Move to "EVENT LOG", and press "ENTER". You will see a similar screen as the following:

		EVENT LOG	}	
EVENT		TIME		COMMENT
NET LOGIN		2008 / APR / 24	10:36:50	
NET LOGIN		2008 / APR / 24	10:33:12	
NET LOGIN		2008 / APR / 24	10:28:15	
KEY UNLOCK		2008 / APR / 24	10:27:14	
VLOSS		2008 / APR / 24	10:23:34	04
VLOSS		2008 / APR / 24	10:23:34	03
VLOSS		2008 / APR / 24	10:23:34	02
VLOSS		2008 / APR / 24	10:23:34	01
POWER ON		2008 / APR / 24	10:23:30	
KEY UNLOCK		2008 / APR / 23	14:37:30	
PREV	NEXT	CLEAN		
	_			
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING				
↑↓ SELECT	← BACK -	• NEXT ←	ER	

7.4 Backup

In this menu list, you can choose to make a copy for a specified period time with a compatible USB flash drive or built-in DVD writer (selected models only) for your own purpose.

Move to , and press "ENTER". You will the following screen:

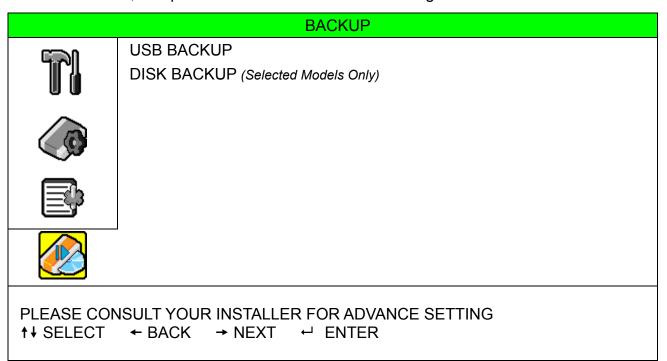

7.4.1 USB BACKUP

Before making USB backup, please check if:

- a) The USB flash drive is supported by your DVR. If not, the message "USB ERROR" will be shown on the screen.
 - For the list of the compatible USB flash drives, please refer to "APPENDIX 2 COMPATIBLE USB FLASH DRIVE BRAND" at page 50.
- b) The format of your USB flash drive must be "FAT 32". If not, please format it to "FAT 32" in your PC.
- c) There is no data in the USB flash drive. If yes, it's recommended to clear all data in the USB flash drive before starting the backup.

Note: When USB backup starts, it's not allowed for OSD menu operation or network backup in order to keep the consistency of the video data.

Note: You can backup up to 2GB video data for one-time USB backup. To backup more data, please set the time & channel(s) you want, and start USB backup again.

Move to "USB BACKUP", and press "ENTER". You will see a similar screen as the following:

	USB BACKUP			
START TIME END TIME AVAILABLE SIZE	2008 / APR / 24 2008 / APR / 24		13:00:05 13:10:05 1960.0MB	
CHANNEL		□ 03	☐ 04	
HDD NUM START			ALL HDD	
PLEASE CONSULT YOUR INSTALLER FOR ADVANCE SETTING ↑↓ SELECT ← BACK → NEXT ← ENTER				

The submenu items are described as below:

1) START TIME

Select the start time of the backup.

2) END TIME

Select the end time of the backup.

3) AVAILABLE SIZE

Display the available capacity in the inserted USB flash drive.

4) CHANNEL

Select channels by pressing "ENTER" to change the symbol in front of the channel number. Symbol " \square " means that this channel is selected to backup.

Symbol "

" means that this channel is not selected to backup.

5) HDD NUM

Press "ENTER" to select the HDD containing the data you need.

6) START

Press "ENTER" to start copying the chosen data to the USB flash drive.

7.4.2 DISK BACKUP (Selected Model Only)

Before making disk backup, please check if the type of your CD or DVD is CD-R or DVD-R. The maximum number of backup files in the CD or DVD is 41.

Note: During the backup process, a file player will also be copied into your disk, and you will see a message "BACKUP PLAYER" shown on the screen.

Move to "DISK BACKUP", and press "ENTER". You will see a similar screen as the following:

	DIGIT D	ACKUP		
START TIME	2008 / AP	R / 24		19:00:05
END TIME	2008 / AP	R / 24		21:00:05
AVAILABLE SIZE				3.79 GB
CHANNEL	∠ 01	□ 02	□ 03	□ 04
HDD NUM START PLEASE CONSULT YOUR II ↑↓ SELECT ← BACK →	_	OR ADVANCE ENTER	SETTINGS	ALL HDD

The submenu items and their functions are almost the same as USB BACKUP. For the description of the submenu items, please refer to the previous page.

The process below describes how to make a disk backup:

- a) Press "EJECT" to open the disk tray. Put the CD or DVD into the DVD writer, and press "EJECT" again to close the disk tray.
- b) Go to "DISK BACKUP", and set the start time, end time, channels and HDD.
- c) Move to "START", and press "ENTER" to start backup.While disk backup is processing, users will see the backup completed percentage on the screen.
- d) After disk backup is completed, "BACKUP SUCCESS" will be prompted on the screen. Press "EJECT" to eject the disk tray and get your disk.
- e) Put the CD or DVD into the DVD-ROM drive of your PC. Install the file player "PLAYER.EXE", and double click any backup file to play it directly in your PC and see if the backup is successful.

Note: The supported PC operating systems are Windows Vista, XP & 2000.

8. REMOTE OPERATION


You can also control the DVR remotely via the supplied licensed software "Video Viewer", Internet Explorer web browser, and Apple's QuickTime player.

8.1 Supplied Licensed Software

8.1.1 Installation & Network Connection

1) Install the software

Step1: Place the supplied CD into your CD-ROM or DVD-ROM drive. The program will be automatically run.



Step2: Click "Licensed Software AP" to install Video Viewer, or click "Download Latest Version" under "Licensed Software AP" to download the latest version of Video Viewer from the Internet.

Step3: follow the on-screen instructions to finish the installation. When the installation is completed, a shortcut icon "" will be placed on your PC desktop.

2) Network Connection

Local Connection (via LAN)

LAN is used when it's the first time to remotely access the DVR and you need to configure the network setting of your DVR based on your network type in advance.

1) Connect the DVR to your PC via a RJ45 network cable. The default DVR values are as follows:

Item	Default Value
IP address	192.168.1.10
User name	admin
Password	admin
Port	80

- 2) Set the PC's IP address as "192.168.1.XXX" (1~255, except 10) in order to make the PC and DVR under the same domain.
- 3) Double-click "P" icon on your PC desktop to enter the control panel. By defaults, the "Address Book" panel will be displayed on the right side of the control panel.
- 4) Click "♣" → "♣ " to key in the default IP address, user name, password, and port number of the DVR you intend to connect.

OR

Click " \square " \rightarrow " to search the available IP address(es) of other DVR(s) under the same domain as

- 5) Double-click the IP address you just added into the address book to log in.
- Remote Connection (via Internet)
 When the network configuration of your DVR is completed, you can access your DVR remotely via Internet.
- 1) Double-click "P" icon on your PC desktop to enter the control panel. By defaults, the "Address Book" panel will be displayed on the right side of the control panel.
- 2) Click " U" → " to key in the IP address, user name, password, and port number of the DVR you intend to connect.

OR


Click " \bigcirc " \rightarrow " to search the available IP address(es) of other DVR(s) under the same domain as your PC's IP address. The found address(es) will be listed, and can be added into the address book by clicking " \bigcirc ".

3) Double-click the IP address you just added into the address book to log in.

8.1.2 Control Panel Overview

Two control panels are available and can be switched depending on your use habit.

Simplified Version (Default)

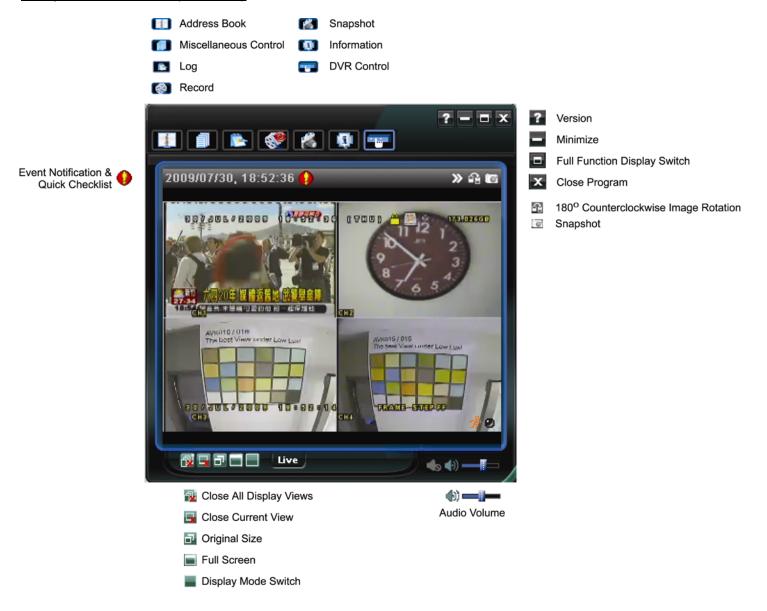

Full Function Version




Main Button Overview

Button		Function	Description		
Simplified	Full Function	Function	Description		
4,046		Address Book		Click to show the predefined IP address(es). You can add, remove or search the IP address to log in the DVR remotely.	
			A	Remote Config	Click to go into the detailed DVR setting.
		Miscellaneous Control		Record Setting	Click to go to the detailed record setting.
				Custom Setting	Click to choose the language of this program. The language change will take effect when this program is closed and executed again.
*		Log	Click to view all event and recording logs, search the desired log(s) by date, or playback the recording of the selected log.		
(4) / (5)	⊕ , ⊕	Record / Record Stop	Click to start / stop the manual recording.		e manual recording.
ris.	0	Snapshot	Click to take a snapshot of the current view. The snapshot will be saved in the path you specified in "Record Setting".		
©	ø	Information	Click to show the current network connection details.		
		DVR Control	Click to go to the DVR control panel to operate the DVR remotely.		

8.1.3. General Operation

Record

To record remotely at the same time for any event or alarm at the DVR side, click " \blacksquare " or " \blacksquare " or " \blacksquare " to go to the "Record Setting" page.

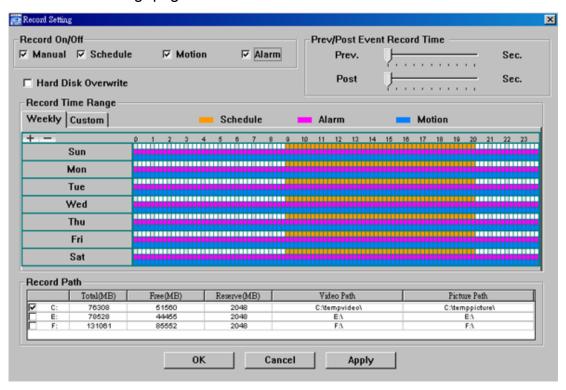

In the "Record Setting" page, you can set the following items:


- Record type
- · Hard disk overwriting
- Pre- / post-alarm record time
- · Record time setting
- Record path

If "Manual" is checked, click " or " on the main control panel to start the manual recording immediately, and the recordings will be saved in the specified location. The red text indication "REC" will be shown at the top left corner of the image display view.

If "Motion" and / or "Alarm" are checked, the recording function will also be enabled at the remote side when any event is triggered at the DVR side, and the recordings will be saved in the specified location.

<u>Playback</u>

To play a recording, click "Loss" or "Loss", and select the "Record" tab or "Backup" tab. A list of all the recordings will be shown by defaults, and you can also sort out the logs you want to speed up the search time.

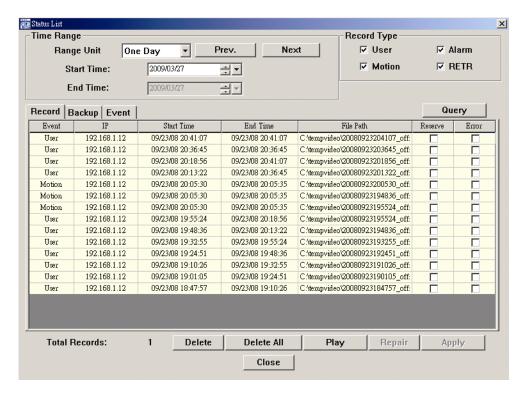


To immediately play a recording, select a log from the list, and click "Play", or double-click the selected log.

Network Backup

Click "III" → "III", or click "III" to go into the "Backup" page as follows, and you can select a specific time range or event to make a video backup remotely.

The file(s) you backup will be from the currently selected IP address.

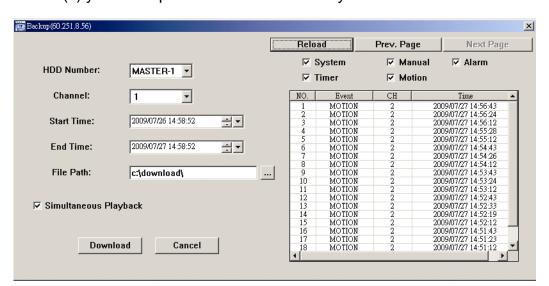

Function	Description
HDD Number / Channel	Specify the hard disk (HDD Number) and channel number (Channel) within which have the video data you need.
Download by Time	Specify the time range within which has the video data you want in the "Start Time" and "End Time" columns.
Download by Event	Select an event log from the event list. This list shows all logs in the specified DVR from the latest to the earliest. • To quickly find the events you need, check or uncheck the event type "System" / "Manual" / "Alarm" / "Motion", and select the log you want. • To view the earlier or later logs that are not shown in the current page, click "Prev. Page" or "Next Page". • To refresh the event list, click "Reload".
File Path	Assign the location where the backup files are saved.
Simultaneous Playback	To view the backup images simultaneously when the download process is in progress, select the checkbox "Simultaneous Playback". You will see the backup images while the images are being downloaded to the PC or notebook.

Function	Description
	To simply backup images without previewing, deselect the checkbox "Simultaneous Playback". You will only see a message box indicating the total time needed, the current status and the saving location.
Download / Cancel	Click "Download" to start or "Cancel" to discard the video backup.

8.1.4. E-Map

Video Viewer is also a Central Management System (CMS) software, which allows network device control & management for up to 16 devices simultaneously.

Note: Before using this function, make sure Video Viewer is connected to all the devices (up to 16) you want to monitor.

E-Map is **ONLY** available when the control panel is switch to the full function version.


How to Add an E-Map Group

STEP1: In the simplified version, click "


"to switch the control panel to the full function version, and click " to enter the E-Map page as follows.



Note: To know where the buttons are, please refer to "Simplified Version (Default) at page 37, and "Full Function Version" at page 38.

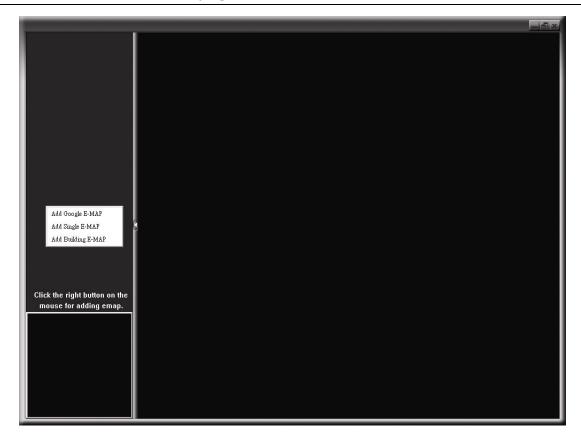

STEP2: Right-click to show the shortcut menu on the top-left panel, and select the E-Map group you want to add. There are three E-Map groups you can add: Google E-MAP, Single E-MAP, and Building E-MAP.

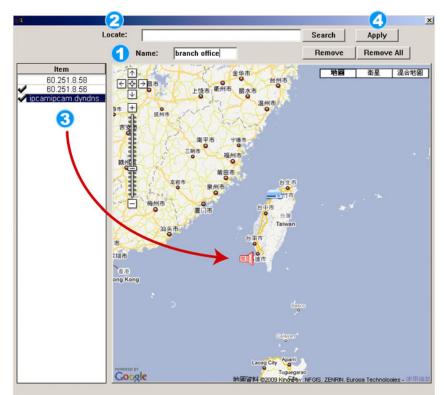


How to add a Google E-Map group:

- 1 Enter the name of this Google E-Map group.
- Enter a specific address or landmark, and click "Search".

 OR


Move to the map and drag to the location you want.

- Click and drag the IP address to where it's located in the current level.
- Click "Apply" to save and finish.

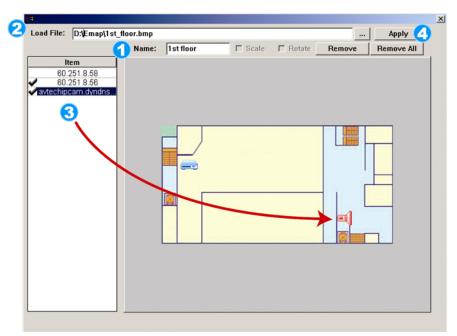

How to add a single E-Map group:


- Enter the name of this single E-Map group.
- Click "..." to browse the map file in BMP or JPEG.
- Click and drag the IP address to where it's located in the current level.
- Click "Apply" to save and finish.

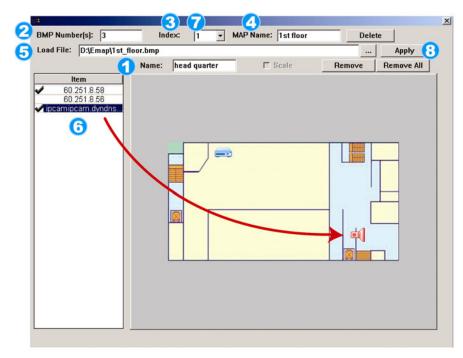

How to add a building E-Map group:

- Enter the name of this building E-Map group.
- Enter the total levels of this building.
- Select the level of the building from the drop-down list.
- Enter the name of the level.
- Click "..." to browse the map file in BMP or JPEG.
- Click and drag the IP address to where it's located in the current level.
- Go back to STEP 3 to select other level of the building, and repeat from STEP 3 to 6 until the setup for all levels are finished.
- (B) Click "Apply" to save and finish.

STEP3: When the E-Map group is created, you will see the tree on the top-left panel, showing all the devices you've added to this group.

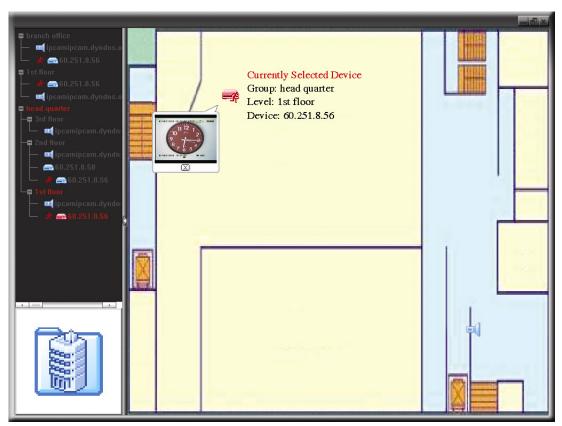


Icon	Description
	The connected device is camera. When it's selected, it will become red.
	The connected device is DVR. When it's selected, it will become red.
£	For any motion or alarm event, it will appear on the screen to catch your attention. To know what's happening quickly, double-click the device icon on the E-Map to show the live view.

How to Edit / Remove an Existing E-Map Group

➤ For Google E-Map Group


Right-click on the group name to show the shortcut menu list, and select "Edit E-MAP" or "Remove E-MAP" as needed.

You can also add a single E-Map group (Add Single E-MAP) or Building E-Map group (Add Building E-MAP) into the existing Google E-Map group.

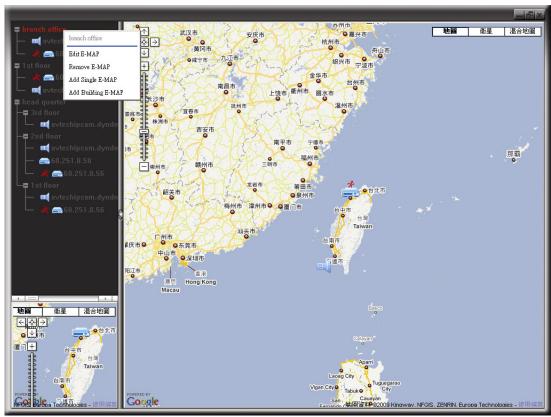

For Single E-Map Group

Right-click on the group name to show the shortcut menu list, and select "Edit E-MAP" or "Remove E-MAP" as needed.

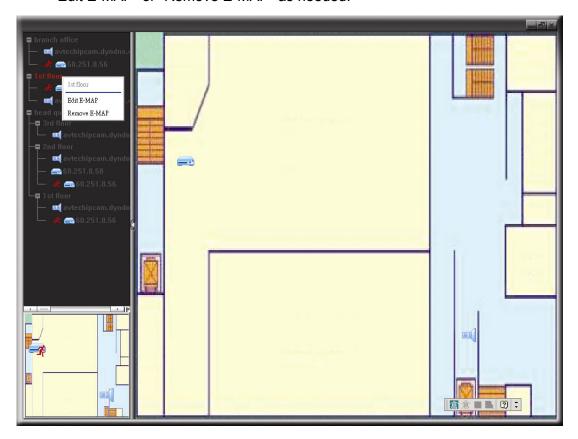

For Building E-Map Group

Right-click on the group name to show the shortcut menu list, and select "Edit Building E-MAP" or "Remove E-MAP" as needed.



To edit or remove a certain level of the building E-Map group, right click on the level name, and select "Edit E-MAP" or "Remove E-MAP" as needed.



8.2 IE Web Browser

You can view the images or operate your DVR with IE web browser.

Note: The supported PC operation systems are Windows 2000 and Windows XP and Vista

- Step 1: Key in the IP address used by your DVR in the URL address box, such as 60.121.46.236, and press Enter. You will be prompted to enter the user name and password to access the DVR.

 If the port number your DVR used is NOT 80, you need to key in the port number additionally. The format is *ipaddress:portnum*. For example, for IP address 60.121.46.236 and port No. 888, please key in "http://60.121.46.236:888" into the URL address box, and press "Enter".
- Step 2: Enter the user name and password, the same as the ones used at AP login, and click "OK". You will see a similar screen as the following when the login information is correct.

Note: The buttons and functions described below are taking 4CH DVR model as an example.



NO.	Function	Description		
1	Home	Click to go to the main page of the DVR.		
2	Config.	Click to go to the detailed DVR setting.		
3	PTZ	Click to enter the PTZ mode.		
4	Channel Selection	Click one of the number to switch to the channel you want to see in full screen.		
5	Selection	Click or logo to the previous / next channel, or change setting.		
6	Display Mode	Click to show 4-cut display. Click to display each channel one by one, starting from CH1. When the last channel is displayed, it will start from CH1 again. To exit from this display mode, press any other channel display button.		
7	Menu and Arrow Keys	Click to enter the menu / exit the menu mode. Move up / down to select the previous / next menu or sub-menu function, or change the setting. Move left / right to the previous / next sub-menu items.		
8	Event	Click to enter the playback search settings screen.		

NO.	Function	Description		
9	Snapshot	Click to take a snapshot for the current view, and open another browser window to display the captured image.		
10	Key Lock	Click to enable the DVR key lock function. To unlock the DVR, key in your password, and press.		
11	Enter	Click to confirm the setting or enter your selection.		
12	Digital Zoom	Click to zoom in / out the selected channel image.		
13	Search	Click to enter the DVR full search menu.		
		You can check all the logs here, and select one of them to payback.		
14	Playback control buttons	(Stop) / (Play) / (Rewind) / (Forward) / (Pause) / (Slow Playback) Rewind / Forward Click once to get 4X fast rewind / forward, twice to get 8X, three times to get 16X, and four times to get 32X the highest. Slow Playback Click once to get 4X slow playback and twice to get 8X slow playback.		
15	Web Transmission	H.264 / QuickTime QuickTime is Apple Inc.'s multimedia software. You need to have QuickTime installed in you operation system first. When "QuickTime" is selected, you will be promoted to enter the user name and password to access the server of the DVR.		
16	Change Quality	BEST / HIGH / NORMAL / BASIC Click to change the image quality.		
17	Change Resolution	4 CIF / CIF Click to change the image resolution (4CIF: 704*480 / CIF: 352*240)		
18	Remote Independent Operation Off / On	Click it to disable / enable the network independent function.		
19	Audio Channel Selection	Select the audio channel you want for listening to the live audio (in the live mode) or playback audio (in the playback mode). Note: You need to connect the camera which supports audio recording to the audio input of the DVR. For details, please refer to "2.2 Rear Panel" at page 6. means no camera which supports audio recording is connected to the DVR.		

8.3 Quick Timer Player

You can also use the QuickTime player to remotely log into the DVR and check the live view only.

Note: QuickTime is Apple's multimedia software. You need to have QuickTime installed in you operation system first, and you can access the DVR to see the live view.

If you have installed QuickTime, please skip Step 1.

Note: The latest version of QuickTime is V6.4 at the time this manual goes to press, and the supported operation systems are Windows Vista / XP / 2000, and Apple Mac.

- Step 1: Go to Apple's official website to download QuickTime. The website address is as follows: http://www.apple.com/quicktime/win.html
 - a). Click "Free Download" to go into the download page, and select to download the free player.
 - b). Leave your Email address, and click "Free Download Now" to download the latest QuickTime player.
 - c). When the download is completed, execute the "QuickTimeInstaller.exe" file, and follow the on-screen instructions to finish the installation procedure.
- Step 2: Open your QuickTime player. Select "File" → "Open URL in New Player...", and key in the URL address.




The URL format is "rtsp://ipaddress:portnum/live/h264" (For example, "rtsp://60.251.8.57:88/live/h264").



Click "OK" to continue.

Step 3: A pop-up window will appear and prompt you to enter the authentication information.


Key in the user name and password for accessing your DVR. The user name and password are the same as the ones you use to log into Video Viewer. If the information is correct, click "OK" to go on. If not, click "Cancel" to guit the accessing.



Note: If you're not prompted to enter the authentication information, and the error message 10060 appears, go to "Edit" → "Preferences" → "QuickTime Preferences", and select "Streaming Transport" front he drop-down list. Select "Use HTTP", and keep the port ID as 80.

Step 4: When the login is successful, you will see the live view.

APPENDIX 1 PIN CONFIGURATION

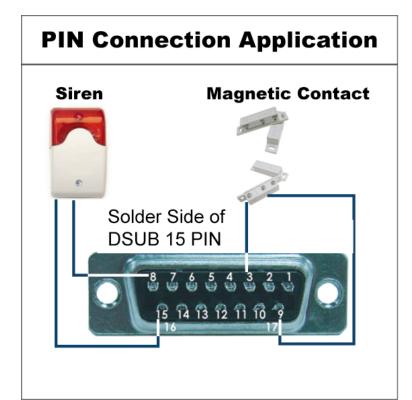

Siren: When the DVR is triggered by alarm or motion, the COM connects with NO and the siren with strobe starts wailing and flashing.

Magnetic Contact: When the magnetic contact is opened, the alarm will be triggered and the recording is on.

PIN	FUNCTION	DESCRIPTION		
1~2	PIN OFF	NA		
3~6	ALARM INPUT	Connect ALARM INPUT (PIN 3 – 6) and GND (PIN 9) connector with wires. Once a alarm is triggered, the DVR will start recording and the buzzer will be on. PIN 3 is Alarm 1. Once the alarm is triggered, the CH1 of the DVR will start alarm-triggered recording. PIN 4 is Alarm 2. Once the alarm is triggered, the CH2 of the DVR will start alarm-triggered recording. PIN 5 is Alarm 3. Once the alarm is triggered, the CH3 of the DVR will start alarm-triggered recording. PIN 6 is Alarm 4. Once the alarm is triggered, the CH4 of the DVR will start alarm-triggered recording.		
7	NC	Under the normal operation, COM connects with NC and disconnects from NO. But when any alarm is triggered, COM disconnects with NC and connects with NO. Attention: The voltage restriction is under DC24V 1A.		
8	NO	Under the normal operation, COM disconnects with NO. But when any alarm is triggered, COM connects with NO. Attention: The voltage restriction is under DC24V 1A.		
9	GND	GROUND		
10	RS485-B	Using RS-485 serial communication signals, DVR can be controlled by keyboard controller.		
11	RS485-A	Using RS-485 serial communication signals, DVR can be controlled by keyboard controller.		
12~14	PIN OFF	NA		
15	EXTERNAL ALARM COM	Under the normal operation, COM disconnects with NO. But when any alarm is triggered, COM connects with NO. Attention: The voltage restriction is under DC24V 1A.		

APPENDIX 2 COMPATIBLE USB FLASH DRIVE BRAND

Please upgrade the firmware of the DVR to the latest version to ensure the accuracy of the following table. If the USB flash drive is not supported by the DVR, the "USB ERROR" message will be shown on the screen.

Note: Please use your PC to format the USB flash drive as "FAT 32".

Note: You can backup up to 2GB video data for one-time USB backup. To backup more data, please set the time & channel(s) you want, and start USB backup again.

MANUFACTURER	MODEL	CAPACITY
Apacer	AH320	2G
	AH320A	8G
	AH220	1G
	AH320	4G
A-data	RB-18	1G
Transcend	JFV35	4G
	JFV30	8G
Sony	Micro Vault Tiny	1G
Sandisk	Cruzer Micro	2G
	Cruzer Micro	4G
	Cruzer4-pk	2G
MSI	F200	4G
PQI	U172P	4G
Netac	U208	1G

APPENDIX 3 COMPATIBLE HDD BRAND

Please upgrade the firmware of the DVR to the latest version to ensure the accuracy of the following table.

MANUFACTURER	MODEL	CAPACITY	ROTATION	
Seagate	ST3320613AS	320GB	7200 rpm	
	ST33500320AS	500GB	7200 rpm	
	ST3750330AS	750GB	7200 rpm	
	ST31000340AS	1000GB	7200 rpm	
WD	WD3200AAKS	320GB	7200 rpm	
	WD5000AACS	500GB	7200 rpm	
	WD6400AAKS	640GB	7200 rpm	
	WD7500AAKS	750GB	7200 rpm	
	WD10EACS	1000GB	7200 rpm	
Maxtor	STM3500320AS	500GB	7200 rpm	
	STM3750330AS	750GB	7200 rpm	
Hitachi	HDT725032VLA360	320GB	7200 rpm	
	HDS721010KLA330	1000GB	7200 rpm	

APPENDIX 4 TROUBLESHOOTING


Please refer to the table below for easy troubleshooting. The table describes some typical problems and also their solutions. Please check them before calling your DVR dealer.

FAQ (Frequently ask question)

Questions	Solutions			
No power	Check power cord connection.			
	Confirm that there is power supplied from the outlet.			
DVR is not working when pressing any button	You might be under "Key Lock" mode. Press any key and enter the password to exit			
	this mode.			
HDD detection failed	Replace with another HDD for testing.			
	Replace with another HDD cable for testing.			
Can't detect your USB flash drive	Replace with another USB flash drive for testing.			
	Format the USB flash drive as FAT 32 format and try again.			
No live video	Confirm the camera is power supplied.			
	Check the setting of the camera lens.			
	Check the monitor's video cable and connection.			
	Check the camera's video cable and connection.			
No recorded video	Check if the HDD is installed and connected properly.			
	Check the "MANUAL RECORD ENABLE" is set to "ON", and the record function in			
	the "CAMERA" menu is set to "ON", too.			
Timer recording is not working	Check if "TIMER RECORD ENABLE" option is set to "ON" and the timer schedule			
	has been arranged.			
Motion detection recording is not working	Check if "EVENT RECORD ENABLE" option is set to "ON".			
	Check the detection function "DET" is set to "ON".			
	Check the detection area "AREA" has been setup.			
Can't play the recorded data on my DVR	There must be at least 8192 images of recorded data for playback to work properly.			
	If not, your DVR will stop the playback.			
	For example, if the IPS is set to 30, the recording time should be at least 273			
	seconds (8192 images / 30 IPS) for the playback to work properly.			
Can't backup the video with audio	Make sure the audio cameras are connected to the DVR channels which support the			
	audio function.			
Can't view the DVR images over the network	Check the DVR firmware version.			
with IE web browser	Please choose to allow the web browser ActiveX or applet in the pop-out message.			
Failed to backup the recorded files of the DVR	You need to be a supervisor to operate this function.			
from remote PC side.	Check if the network connection information is correct (IP Address / Port / User			
(For details, please see "Network Backup" at	Name / Password).			
page 40.)	Specify the hard disk (HDD Number) and channel number (Channel) within which			
	have the recorded data you need.			
Failed to upgrade the firmware / OSD file	Check the USB flash drive is format to FAT32.			
	Check the firmware / OSD is correct.			
Can't use the IR remote control	Check whether if the batteries are installed or not.			
	Aiming at the IR receiving zone to control the DVR operation.			

APPENDIX 5 RS485 PROTOCOL

- Use PC keyboards to simulate DVR keypads.
- ◆ Data: REMOTE PROTOCOL uses 8 bit data, 1 start bit, 1 stop bit.

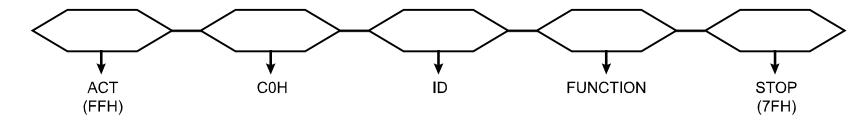

FUNCTION	CODE	ASCII	FUNCTION	CODE	ASCII
KEY_MENU	0x4D	М	KEY_SET_CHANNEL	0x6e	n
KEY_ENTER	0x0D	ENTER	KEY_DWELL	0x65	е
KEY_PLUS	0x6b	k	KEY_CH1	0x31	1
KEY_MINUS	0x6d	m	KEY_CH2	0x32	2
KEY_UP	0x55	U	KEY_CH3	0x33	3
KEY_DOWN	0x4E	N	KEY_CH4	0x34	4
KEY_LEFT	0x4C	L	KEY_CH5	0x35	5
KEY_RIGHT	0x52	R	KEY_CH6	0x36	6
KEY_POWER	0x57	W	KEY_CH7	0x37	7
KEY_REC	0x72	r	KEY_CH8	0x38	8
KEY_PLAY	0x50	Р	KEY_CH9	0x39	9
KEY_SLOW	0x53	S	KEY_CH10	0x41	А
KEY_ZOOM	0x5A	Z	KEY_CH11	0x42	В
KEY_KEY LOCK	0x4B	К	KEY_CH12	0x43	С
KEY_AUDIO	0x64	d	KEY_CH13	0x44	D
KEY_SEARCH	0x73	S	KEY_CH14	0x45	Е
KEY_PTZ_MODE	0x70	р	KEY_CH15	0x46	F
KEY_PTZ_PRESET	0x71	q	KEY_CH16	0x47	G
KEY_PTZ_ZOOM_IN	0x69	i	KEY_EJECT_DVD	0x6a	j
KEY_PTZ_ZOOM_OUT	0x66	f	KEY_IRIS_NEAR	0x67	g
KEY_MODE	0x6f	0	KEY_IRIS_FAR	0x68	h
KEY_4 CUT	0x61	а	KEY_PTZ_LIGHT	0x6c	I
KEY_9 CUT	0x62	b	KEY_PTZ_WIPER	0x77	W
KEY_16 CUT	0x63	С			