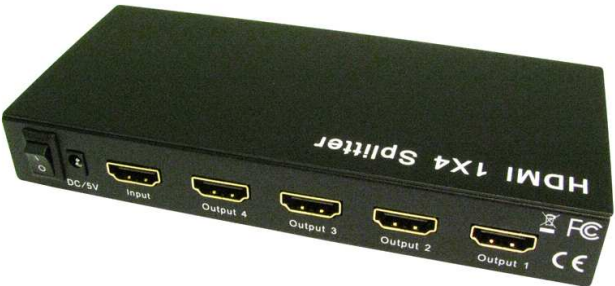


4 Way HDMI Splitter

HDMI 4 Way	
	<p>Features</p>
	<p>Distributes 1 HDMI source to 4 HDMI Displays simultaneously</p>
	<p>HDMI™ (V.1.4 with 3D & 4KX2K).</p>
	<p>Supports all the mandatory and several optional 3D formats described in HDMI 1.4 specifications.</p>
	<p>Supports High Definition Resolutions :4KX2K @ 24 HZ, 1080p @ 60HZ, 720p/1080i @120Hz</p>
	<p>Supports Digital Audio Format, such as High Definition Audio support: Dolby TrueHD, and DTS-HD Master Audio.</p>
	<p>DC 5V Power.</p>
Specifications	
Operating Temperature Range	-5 to +35°C(+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Input Video Signal	0.5-1.0 Volts P-P
Input DDC Signal	5 volts p-p(TTL)
Data transfer speed rate	6.75Gbps(Maximum)
Video Format Supported	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K 3D video support
HDMI Output	HDMI 1.4+HDCP1.1
Support Video Color Format	xv-YCC/deep color 36bit
Support Audio Format	DTS-HD/true-HD/LPCM7.1/AC3/DTS/DSD
Power consumption	10watts(Maximum)
Dimension (L×W×H)	115x62x25mm
Net Weight	210g